

UDC 621.882.213.082.1

February 1985

Square head bolts with short dog point

DIN
479

Vierkantschrauben mit Kernansatz

Supersedes July 1968 edition.

In keeping with current practice in standards published by the International Organization for Standardization (ISO), a comma has been used throughout as the decimal marker.


Dimensions in mm

1 Scope and field of application

This standard specifies product grade A square head bolts with short dog point and M 5 to M 24 coarse thread.

Where, for special purposes, the bolts are to meet requirements differing from those specified in the present standard, e.g. in respect of nominal length or property class, the specifications of the relevant standards shall be complied with.

2 Dimensions

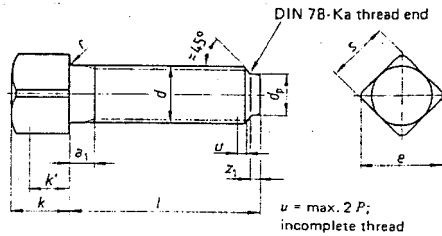

k' is the minimum wrenching height; for this zone at least e shall be maintained.

a_1 as in DIN 76 Part 1, d_0 and z_1 as in DIN 78.

Continued on pages 2 to 4

Page 2 DIN 479

| Thread size <i>d</i> | | | M 5 | M 6 | M 8 | M 10 | M 12 | M 16 | | M 20 | | M 24 |
|---|-------------------------|-------|---|------|------|-------|-------|------------------|-------|------------------|-------|-------|
| <i>P</i> ¹⁾ | | | 0,8 | 1 | 1,25 | 1,5 | 1,75 | 2 | | 2,5 | | 3 |
| <i>d</i> _f | max | | 2,4 | 3 | 4 | 4,5 | 5,3 | 6 | | 7,5 | | 9 |
| <i>d</i> _p | max = nominal dimension | | 3,5 | 4 | 5,5 | 7 | 8,5 | 12 | | 15 | | 18 |
| | min | | 3,32 | 3,82 | 5,32 | 6,78 | 8,28 | 11,73 | | 14,73 | | 17,73 |
| <i>r</i> | max = nominal dimension | | 6,5 | 8 | 10 | 13 | 17 | 21 | 22 | 27 | 28 | 32 |
| | min | | 5,92 | 7,42 | 9,42 | 12,3 | 16,3 | 20,16 | 21,16 | 26,16 | 27,16 | 31 |
| Nominal dimension | | | 5 | 6 | 8 | 10 | 12 | 16 | | 20 | | 22 |
| <i>h</i> | min | | 4,85 | 5,85 | 7,82 | 9,82 | 11,79 | 15,79 | | 19,74 | | 21,74 |
| | max | | 5,15 | 6,15 | 8,18 | 10,18 | 12,21 | 16,21 | | 20,26 | | 22,26 |
| <i>R'</i> | min | | 3,4 | 4,1 | 5,5 | 6,9 | 8,3 | 11,1 | | 13,8 | | 15,2 |
| <i>r</i> | min | | 0,2 | 0,25 | 0,4 | 0,4 | 0,6 | 0,6 | | 0,8 | | 0,8 |
| | max = nominal dimension | | 5 | 6 | 8 | 10 | 13 | 16 ²⁾ | 17 | 21 ²⁾ | 22 | 24 |
| <i>s</i> | min | | 4,82 | 5,82 | 7,78 | 9,78 | 12,73 | 15,73 | 16,73 | 20,67 | 21,67 | 23,67 |
| | min = nominal dimension | | 1,25 | 1,5 | 2 | 2,5 | 3 | 4 | | 5 | | 6 |
| <i>z</i> ₁ | min | | 1,5 | 1,75 | 2,25 | 2,75 | 3,25 | 4,3 | | 5,3 | | 6,3 |
| | max | | 1,5 | 1,75 | 2,25 | 2,75 | 3,25 | 4,3 | | 5,3 | | 6,3 |
| <i>l</i> | | | Mass (7,85 kg/dm ³), in kg per 1000 units ≈ | | | | | | | | | |
| Nominal size | min | max | | | | | | | | | | |
| | | | | | | | | | | | | |
| 8 | 7,71 | 8,29 | 2,59 | 3,00 | | | | | | | | |
| 10 | 9,71 | 10,29 | 2,83 | 3,35 | 7,15 | | | | | | | |
| 16 | 15,65 | 16,35 | 3,57 | 4,41 | 9,00 | 15,5 | | | | | | |
| 20 | 19,58 | 20,42 | 4,05 | 5,10 | 10,2 | 17,4 | 30,8 | | | | | |
| 25 | 24,58 | 25,42 | 4,66 | 5,97 | 11,7 | 19,8 | 34,4 | | | | | |
| 30 | 29,58 | 30,42 | 5,26 | 6,84 | 13,3 | 22,3 | 38,0 | | | | | |
| 35 | 34,5 | 35,5 | 5,87 | 7,71 | 14,9 | 24,8 | 41,6 | | | | | |
| 40 | 39,5 | 40,5 | 6,48 | 8,58 | 16,4 | 27,3 | 45,2 | 87,6 | | | | |
| 45 | 44,5 | 45,5 | | 9,44 | 18,0 | 29,7 | 48,8 | 94,3 | | | | |
| 50 | 49,5 | 50,5 | | | 19,5 | 32,2 | 52,4 | 101 | 176 | | | |
| 55 | 54,4 | 55,6 | | | 21,1 | 34,7 | 56,0 | 107 | 186 | | | 259 |
| 60 | 59,4 | 60,6 | | | | 37,2 | 59,6 | 114 | 197 | 273 | | |
| 70 | 69,4 | 70,6 | | | | | 66,8 | 127 | 217 | 303 | | |
| 80 | 79,4 | 80,6 | | | | | 74,0 | 140 | 238 | 333 | | |
| 90 | 89,3 | 90,7 | | | | | 81,2 | 153 | 258 | 362 | | |
| 100 | 99,3 | 100,7 | | | | | | 167 | 279 | 392 | | |
| 110 | 109,3 | 110,7 | | | | | | 180 | 299 | 421 | | |
| 120 | 119,3 | 120,7 | | | | | | 193 | 320 | 451 | | |
| 140 | 139,2 | 140,8 | | | | | | | 361 | 510 | | |
| Intermediate lengths shall be avoided as far as possible. | | | | | | | | | | | | |
| Lengths over 140 mm shall be graded in 20 mm steps. For these lengths, the permissible deviations specified in ISO 4759 Part 1 shall apply. | | | | | | | | | | | | |
| 1) <i>P</i> = pitch of thread (coarse thread). | | | | | | | | | | | | |
| 2) See clause 4. | | | | | | | | | | | | |

3 Technical delivery conditions

| Material | | Steel |
|---|--|-----------------------|
| General requirements | | As in DIN 267 Part 1. |
| Thread | Tolerance | 6g |
| | Standard | DIN 13 Part 15 |
| Mechanical properties ¹⁾ | Property class (material) | 5.6; 5.8; 8.8 |
| | Standard | ISO 898 Part 1 |
| Permissible dimensional deviations and deviations of form | Product grade | A (previously m). |
| | Standard | ISO 4759 Part 1 |
| Surface | As processed. Property class 8.8 bolts: (thermally or chemically) blackened. DIN 267 Part 2 shall apply with regard to surface roughness. DIN 267 Part 19 shall apply with regard to permissible surface discontinuities. DIN 267 Part 9 shall apply with regard to electroplating. DIN 267 Part 10 shall apply with regard to hot dip galvanizing. | |
| Acceptance inspection | DIN 267 Part 5 shall apply with regard to the acceptance inspection. | |
| ¹⁾ Other property classes, materials or hardened thread ends are subject to agreement. | | |

4 Designation

Designation of an M 12 square head bolt with short dog point, of length l (nominal size) = 40 mm and assigned to property class 5.6:

Square head bolt DIN 479 – M 12 × 40 – 5.6

If it is required that M 16 and M 20 bolts be supplied with the new widths across flats 16 mm and 21 mm, as specified in ISO 272, then the width across flats (SW) is to be incorporated in the designation, e.g.:

Square head bolt DIN 479 – M 16 × 50 – SW 16 – 5.6

If it is required that the bolts be supplied with a hardened short dog point, then the symbol geh (hardened) shall be incorporated in the designation, e.g.:

Square head bolt DIN 479 – M 12 × 40 – 5.6 geh

For ordering purposes, the designation of types and designs not specified here shall conform to DIN 962.

Page 4 DIN 479

Standards referred to

| | |
|-----------------|--|
| DIN 13 Part 15 | ISO metric screw thread; fundamental deviations and tolerances for threads from 1 mm diameter |
| DIN 76 Part 1 | Thread runouts; undercuts for ISO metric screw threads as defined in DIN 13 |
| DIN 78 | Thread ends; lengths of projection of thread ends for ISO metric screw threads as defined in DIN 13 |
| DIN 267 Part 1 | Fasteners; technical delivery conditions; general requirements |
| DIN 267 Part 2 | Fasteners; technical delivery conditions; design and dimensional accuracy |
| DIN 267 Part 5 | Fasteners; technical delivery conditions; acceptance inspection |
| DIN 267 Part 9 | Fasteners; technical delivery conditions; electroplated components |
| DIN 267 Part 10 | Fasteners; technical delivery conditions; hot-dip galvanized parts |
| DIN 267 Part 19 | Fasteners; technical delivery conditions; surface discontinuities on bolts and screws |
| DIN 962 | Screws, bolts, studs; designations, types and designs |
| ISO 272 | Fasteners; hexagon products, widths across flats |
| ISO 898 Part 1 | Mechanical properties of fasteners; bolts, screws and studs |
| ISO 4759 Part 1 | Tolerances for fasteners; bolts, screws and nuts with thread diameters from 1,6 to 150 mm, product grades A, B and C |

Previous editions

DIN 479 Part 1: 10.26, 05.42, 05.53, 03.61

DIN 479: 03.68, 07.68

Amendments

The following amendments have been made in comparison with the July 1968 edition:

- a) Additions have been made to the technical delivery conditions, which have also been brought into line with the relevant standards.
- b) The previous design m as specified in DIN 267 Part 2 has been replaced by product grade A as specified in ISO 4759 Part 1.
- c) Limits of size calculated from the permissible dimensional tolerances have been included.
- d) For sizes M 16 and M 20, the widths across flats 16 mm and 21 mm as specified in ISO 272 have been added.
- e) The content of the standard has been editorially revised.
- f) The dimensions of the short dog point have been brought into line with DIN 78 (≙ ISO 4753).

International Patent Classification

F 16 B 35/00

F 16 B 23/00