

February 1995

Studs

with a length of engagement equal to about 2 d

DIN
835

ICS 21.060.10

Supersedes December 1972 edition.

Descriptors: Fasteners, studs.

Stiftschrauben, Einschraubende = 2 d

In keeping with current practice in standards published by the International Organization for Standardization (ISO), a comma has been used throughout as the decimal marker.


The studs specified in DIN 949-1 shall be given preference over those specified in the present standard, as the latter is to be withdrawn by 31 January 2000 (see Explanatory notes).

Dimensions in mm

1 Scope and field of application

This standard specifies dimensions and technical delivery conditions for studs intended for use mainly in aluminium alloys. As specified in DIN 267-2, the stud end thread shall be produced to tolerance Sk6 as in DIN 13-51, unless the stud is designated Fo ('without interference-fit thread') or Sn4.

2 Dimensions

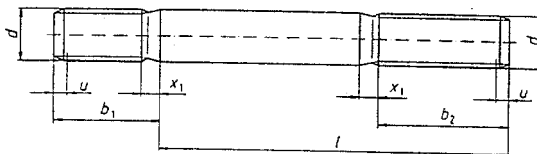

DIN 78 — K type nut end

u (incomplete thread):
1,5 P maximum.

 b_1 = stud end b_2 = nut end

Continued on pages 2 to 4.

Table 1: Dimensions

<i>d</i>	M4	M5	M6	(M7)	M8 M8×1	M10 M10×1,25	M12 M12×1,25 M12×1,5	(M14) (M14×1,5)	M16 M16×1,5	(M18) (M18×1,5)	M20 M20×1,5	(M22) (M22×1,5)	M24 M24×2
<i>b</i> ₁	8	10	12	14	16	20	24	28	32	36	40	44	48
¹⁾ ²⁾ ³⁾ <i>b</i> ₂	14	16	18	20	22	26	30	34	38	42	46	50	54
	20	22	24	26	28	32	36	40	44	48	52	56	60
	—	—	—	—	—	—	45	53	57	61	65	69	73
<i>x</i> ₁	1,75	2,0	2,5	2,5	3,2	3,8	4,3	5,0	5,0	6,3	6,3	6,3	7,5
<i>l</i> js15	Approximate mass (7,85 kg/dm ³) per 1000 units, in kg												
12													
(14)													
16													
(18)													
20	2,26												
(22)	2,46	4,08											
25	2,75	4,54	6,74										
(28)	3,05	5,00	7,41	10,7									
30	3,25	5,30	7,85	11,3	15,0								
35	3,74	6,07	8,95	12,8	17,0	28,2							
40	4,23	6,84	10,1	14,3	18,9	31,3	47,5						
45		7,61	11,2	15,8	20,9	34,4	51,9	73,9					
50		8,38	12,3	17,3	22,9	37,4	56,4	79,9	111				
55			13,4	18,8	24,9	40,5	60,8	86,0	119	152			
60			14,5	20,4	26,8	43,6	65,3	92,0	127	162	211		
65				21,9	28,8	46,7	69,7	98,1	135	172	223	283	
70				23,4	30,8	49,8	74,1	104	143	182	236	298	
75				32,8	52,9	78,6	110	150	192	248	313	358	376
80					34,7	55,9	83,0	116	158	202	260	328	394
(85)						59,0	87,5	122	166	212	273	343	411
90						62,1	91,9	126	174	222	285	358	429
(95)							65,2	96,3	134	182	232	297	373
100							68,3	101	140	190	242	310	387
110								110	152	206	262	334	417
120								118	165	221	282	359	447
130									177	237	302	384	477
140									189	253	322	408	507
150										269	342	433	537
160										285	362	458	566
170											382	482	596
180											402	507	626
190												532	656
200												556	686

1) For lengths, *l*, of 125 mm or less.
2) For lengths, *l*, above 125 mm up to 200 mm.
3) For lengths, *l*, exceeding 200 mm.
Lengths above 200 mm shall be graded in 20 mm steps.
Bracketed sizes and intermediate lengths should be avoided if possible.
The zone between the continuous thick lines indicates the range of commercial sizes of studs with coarse pitch thread.
Studs of sizes above this range cannot be manufactured with a nut end thread length, *b*₂, as specified in the table. In such cases, *b*₂ will be approximately equal to *l* - (*b*₁ + 3). For sizes above the dashed line, *b*₂ + *x*₁ will be less than 1,2 *b*₁. The nut end of these studs shall be rounded (i.e. given a DIN 78—L type end), unless the end is already marked with the property class.

3 Technical delivery conditions

Table 2: Technical delivery conditions

Material		Steel	
General requirements		As specified in ISO 8992.	
Thread	Tolerance	Stud end: 6g DIN 13-51.	Nut end: 6g DIN 13-12 and DIN 13-15.
	As specified in		
Mechanical properties	Property class ¹⁾ (material)	5.6, 8.8 or 10.9	
	As specified in	DIN EN 20 898-1.	
Limit deviations, geometrical tolerances	Product grade	A	
	As specified in	ISO 4759-1.	
Surface finish	Property class 5.6, as processed. Property classes 8.8 and 10.9: (thermally or chemically) blackened. DIN 267-2 shall apply with regard to surface roughness. DIN EN 26 157-3 shall apply with regard to limits for surface discontinuities. ISO 4042 shall apply with regard to electroplating. The limits of thread size shall also apply after coating.		
Acceptance inspection	As specified in ISO 3269.		

¹⁾ Use of other property classes or materials shall be subject to agreement.

4 Designation

Designation of a stud with an M12 interference-fit thread as in DIN 13-51, with a nominal length, l , of 80 mm, and assigned to property class 8.8:

Stud DIN 835 — M12 × 80 — 8.8

Designation of an M12 stud without interference-fit thread (Fo), with a nominal length, l , of 80 mm, and assigned to property class 8.8:

Stud DIN 835 — M12 Fo × 80 — 8.8

Where studs are to be supplied with a different thread on either end, this shall be indicated in the designation, with the symbol for the thread of the stud end preceding that for the nut end, e.g.:

Stud DIN 835 — M12 — M12 × 1,25 × 80 — 8.8

DIN 962 shall apply to the designation of type and finish, with additional information to be given on ordering.
The DIN 4000 — 2 — 4 tabular layout of article characteristics shall apply to studs as covered in this standard.

Standards and other document referred to

DIN 13-12	ISO metric screw threads; coarse and fine pitch threads with diameters from 1 to 300 mm; selected diameters and pitches
DIN 13-15	ISO metric screw threads; fundamental deviations and tolerances for screw threads of 1 mm diameter and larger
DIN 13-51	ISO metric screw threads; external threads for transition fits; tolerances, limit deviations and limits of size
DIN 78	Thread ends and lengths of projection of bolt ends for ISO metric screw threads in accordance with DIN 13
DIN 267-2	Fasteners; technical delivery conditions; design and dimensional accuracy
DIN 962	Bolts, screws, studs and nuts; designation of types and finishes
DIN 4000-2	Tabular layouts of article characteristics for bolts, screws and nuts
DIN EN 20 898-1	Mechanical properties of fasteners; bolts, screws and studs (ISO 898-1 : 1988)
DIN EN 26 157-3	Fasteners; surface discontinuities; bolts, screws and studs for special requirements (ISO 6157-3 : 1988)
ISO 3269 : 1988	Fasteners; acceptance inspection
ISO 4042 : 1989	Threaded components; electroplated coatings
ISO 4759-1 : 1978	Tolerances for fasteners; bolts, screws and nuts with thread diameters from 1.6 to 150 mm; product grades A, B and C
ISO 8992 : 1986	Fasteners; general requirements for bolts, screws, studs and nuts
H.J. Bestenreiner	<i>Metrisches ISO-Gewinde; Gewinde für Festsitz in Leichtmetall-Legierungen (DIN 8141-1 und DIN 8141-2), DIN-Mitteilungen, 1993: 72 (7), 411 to 415.</i>

Previous editions

DIN 835: 1943-12, 1953-03, 1972-12; DIN 836: 1943-12, 1953-03.

Amendments

The following amendments have been made to the December 1972 edition.

- By analogy with ISO 4759-1, the length of the stud end is now designated h_1 .
- Symbol b has been replaced by b_2 .
- By analogy with DIN 78, symbol z_1 has been replaced by u .
- By analogy with DIN 76-1, symbol x has been replaced by x_1 .
- The standard has been editorially revised.

Explanatory notes

Recent research on interference-fit threads has shown that tolerance Sk6 specified for the pitch diameter of external threads does not ensure sufficient tightness of fit. Thus, a new interference-fit thread has been developed in which a tight fit is achieved by an increased external thread major diameter (see H.J. Bestenreiner, *Metrisches ISO-Gewinde; Gewinde für Festsitz in Leichtmetall-Legierungen (DIN 8141-1 und DIN 8141-2)* (ISO metric screw thread; interference-fit threads in light metal alloys) (DIN 8141-1 and DIN 8141-2)).

For use in light metals, it is recommended that studs as specified in DIN 949-1 or DIN 949-2 be used which are provided with a DIN 8141-1 interference-fit thread. Such studs are particularly suitable for automatic assembly (e.g. in the automobile industry), since both thread ends can be produced to the same thread limits of size without the strength of the stud/nut assembly being weakened.