


角形外舌止动垫圈

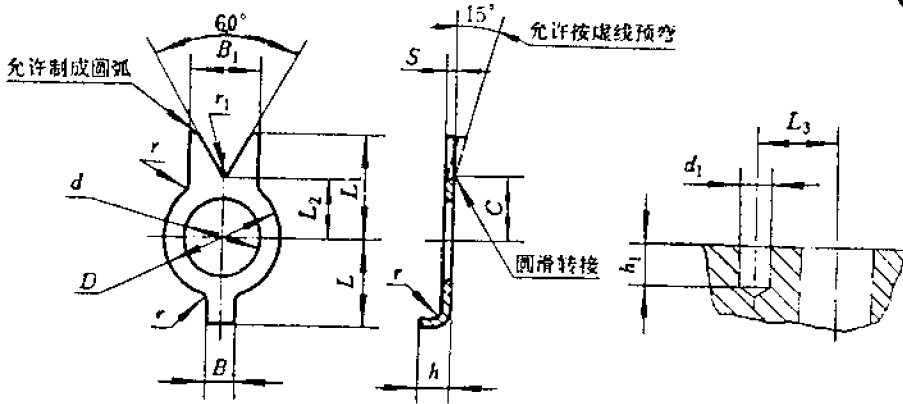

标记示例:

公称直径 8 mm、材料为 A3、经退火、不经表面处理的角形外舌止动垫圈:
垫圈 8 GB 1024-76

mm

公称直径 (螺纹直径)	d		D		L		L ₁	L ₂	B	B ₁	h	C	S	r	r ₁	相关结构的尺寸			每1000个钢垫圈重量 kg≈
	公称尺寸	允差	公称尺寸	允差	公称尺寸	允差										d ₁	h ₁	L ₃ ±0.10	
4	4.1	+0.30	7	-0.36	6	±0.30	6.5	3.5	2.7	5.6	3	4	0.5	0.5	0.5	3	4	5.8	0.18
5	5.1		8		7		8	4		6.8		4.5					6.8	0.24	
6	6.1	+0.36	10	-0.43	8	±0.30	9	5	3.7	7.2	4	5.5	0.8	0.8	4	5	7.6	0.50	
8	8.1		13		9		11	6.5		8		7					8.6	0.80	
10	10.1	+0.43	15	-0.52	11	±0.30	13	7.5	5.2	9	5	8.5	0.8	1	6	6	10.6	1.02	
12	12.1		18		14		15	9		10.5		10					13.6	1.40	
14	14.1	+0.52	20	-0.62	15	±0.30	16	10	5.7	12	5	11	1.2	1	6	6.5	14.6	1.60	
16	16.1		23		16		18	11.5		13		12.5					15.5	2.45	
18	18.1	+0.52	25	-0.62	17	±0.30	20	12.5	5.7	15	5.5	13.5	1.2	1.5	6	6.5	16.5	2.76	
20	20.1		28		18		22	14		16.5		15					17.5	3.35	
22	22.1	+0.52	31	-0.62	20	±0.30	24	15.5	5.7	17.5	5.5	16.5	1.2	1.5	6	6.5	19.4	4.85	
24	24.1		34		21		26	17		19		18					20.4	5.70	

技术条件按 GB 98-76 的规定。